

**Material Key:**

B: Brass, C: Stainless Steel, CH: Chrome Plated, D: Aluminium, P: Zinc Plated Carbon Steel, Z1: Silver Plated Carbon Steel

**G-LINK BAYONET-TYPE**


**1. CHOOSE SEAL TYPE:**

Seal type	Chemical description	Operating temperatures	Fluids
FPM B	Fluorocarbon	-20°C to 200°C	Fuel, Ethanol, Vegetable oil
TFE/P	Tetrafluoroethylene & Propylene	-5°C to 170°C	Brake fluid




**2. CHOOSE CONFIGURATION:**

AN	JIC/UNF	Nominal size	Body ID (mm)
-03	3/8 x 24	-03	3.5
-04	7/16 x 20	-03	3.5
-04	7/16 x 20	-05	5.5
-06	9/16 x 18	-05	5.5
-06	9/16 x 18	-08	8.5
-08	3/4 x 16	-08	8.5



Nominal Diam.

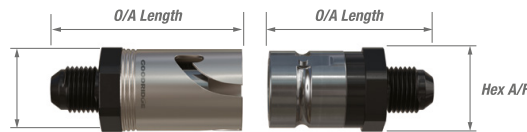

**G-Link Bayonet type**

The bayonet type uses a locking mechanism designed for single handed operation, a 'push and twist' of the outer sleeve will couple/uncouple the G-Link with no separate actuation required for operation. Both halves, plug and socket, are equipped with self-acting valves to stop fluid loss and air ingress. The bayonet type can hold pressure up to 200 bar (AN-03). Available in JIC/UNF AN-03, AN-04, AN-06 & AN-08 thread fitments.

**Plugs and Sockets are ordered separately**

**Please note:**

AN-04 and AN-06 thread fitments are available with 3.5/5.5mm & 5.5/8.5mm internal diameter body types respectively.

**3. SELECT PART NO:**

Part No.	Nominal size	Part	Dash	Seal	Hex A/F	O/A Length	Coupled Length	Nominal Ø	MWP	Weight	Type
GQD03BP03EA	03	plug	-03	TFE/P	13 mm	34.7 mm	38 mm	3.5 mm	200 bar	7 g	standard
GQD03BP03BEA	03	plug	-03	TFE/P	13 mm	41.2 mm	38 mm	3.5 mm	200 bar	8 g	bulkhead
GQD03BS03EA	03	socket	-03	TFE/P	13 mm	42.5 mm	38 mm	3.5 mm	200 bar	10 g	standard
GQD03BP03F	03	plug	-03	FPM	13 mm	34.7 mm	38 mm	3.5 mm	200 bar	7 g	standard
GQD03BS03F	03	socket	-03	FPM	13 mm	42.5 mm	38 mm	3.5 mm	200 bar	10 g	standard
GQD03BP04EA	03	plug	-04	TFE/P	13 mm	36.2 mm	38 mm	3.5 mm	200 bar	7 g	standard
GQD03BS04EA	03	socket	-04	TFE/P	13 mm	44.05 mm	38 mm	3.5 mm	200 bar	11 g	standard
GQD03BP04F	03	plug	-04	FPM	13 mm	36.2 mm	38 mm	3.5 mm	200 bar	7 g	standard
GQD03BS04F	03	socket	-04	FPM	13 mm	44.05 mm	38 mm	3.5 mm	200 bar	11 g	standard
GQD05BP04F	05	plug	-04	FPM	17 mm	39.6 mm	43 mm	5.5 mm	150 bar	13 g	standard
GQD05BS04F	05	socket	-04	FPM	17 mm	47.5 mm	43 mm	5.5 mm	150 bar	17 g	standard
GQD05BP04BEA	05	plug	-04	TFE/P	17 mm	47.5 mm	43 mm	5.5 mm	150 bar	15 g	bulkhead
GQD05BS04EA	05	socket	-04	TFE/P	17 mm	47.5 mm	43 mm	5.5 mm	150 bar	17 g	standard
GQD05BP06F	05	plug	-06	FPM	17 mm	39.6 mm	43 mm	5.5 mm	150 bar	14 g	standard
GQD05BS06F	05	socket	-06	FPM	17 mm	47.5 mm	43 mm	5.5 mm	150 bar	18 g	standard
GQD08BP06F	08	plug	-06	FPM	24 mm	49.1 mm	58 mm	8.5 mm	100 bar	26 g	standard
GQD08BS06F	08	socket	-06	FPM	24 mm	58.6 mm	58 mm	8.5 mm	100 bar	38 g	standard
GQD08BP08F	08	plug	-08	FPM	24 mm	51.6 mm	58 mm	8.5 mm	100 bar	30 g	standard
GQD08BS08F	08	socket	-08	FPM	24 mm	61.1 mm	58 mm	8.5 mm	100 bar	42 g	standard